

A CSW Industrials Company

INSTALLATION INSTRUCTIONS



New quick-lock fixed design for condensers 30"x30"x30" and smaller






* Four 1/4" x 2-3/4" Countersunk Tapcons not included. (#24185)

Recommended tools: A drill, 3/16" masonry bit, a 1/4" socket, a Philips bit, four 2 3/4 x 1/4" Tapcons (Tapered phillips head) and a pencil or marker.

Before beginning:

- 1. Remove all shrubs or debris from around AC unit.
- 2. Ensure AC unit is smaller than 30" height x 30" wide x 30" deep.
- 3. Place all box contents flat on the ground, arranging sections in Left, Front Center, and Right format, with stubs on center panel facing up. **See diagram B.**

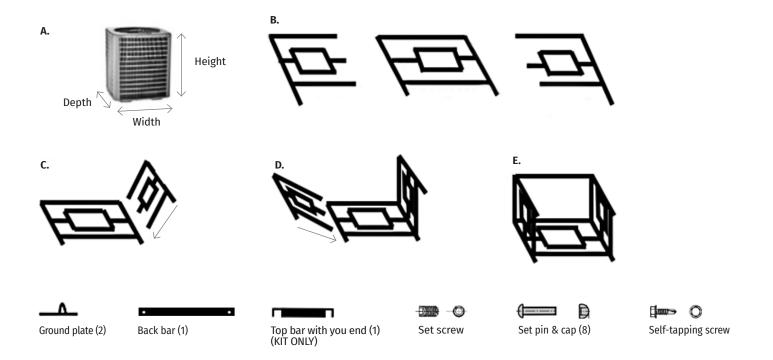

Technical Support Call 1-800-648-6802

ASSEMBLY INSTRUCTIONS:

- 1. Align right panel (3) with those on center panel stubs and insert.
- 2. Repeat for left panel.
- 3. Insert set pins (6) with black head facing cage exterior.
- 4. Attach locking caps on pins (6).



INSTALLATION INSTRUCTIONS

30 x 30 x 30 Fixed Cage

- 5. Insert Back bar into stubs located on left and right panels.
- 6. Insert set pins and secure both locking caps.
- 7. Stand cage upright.
- 8. Center cage over AC unit with Back bar toward the building.
- 9. Trace both foot brackets onto pad surface.
- 10. Tilt cage forward on front legs, to allow full access to AC unit.
- 11. Place ground-plates on traced pattern.
- 12. Mark spots where holes are to be drilled.
- 13. Drill 4 holes (use 3/16" concrete drill bit).
- 14. Position ground-plates over holes and insert screws.
- 15. Replace cage over AC unit positioning ground plate loop thru cage foot.
- 16. Install locks.

NOTE: AC GUARD locks and magnetic lock box are ONLY included with KIT.

- 17. Stretch Top Bar to desired length (left to right) and secure the U-shaped ends into the cage sides with self-tapping screws provided w ¼ drill socket. ACGU30 KIT only.
- 18. For ACGU30X KIT, secure expanded metal top over cage and secure using self-tapping screws.
- 19. Use magnetic hide-a-key to store 1 key and attach to AC unit inside home or office for easy maintenance access.

Limited Warranty



For more information on our product warranty, visit rectorseal.com.

Manufactured by

RectorSeal, LLC

2601 Spenwick Drive • Houston, TX 77055, USA • 800-231-3345 • Fax 800-441-0051 • rectorseal.com 3255 Wyandotte St. East • Windsor, ON N8Y 1E9, Canada • 519-966-4901